

BW series

Battery Operated Bench Platform Scales

- Environmentally Sealed to IP 65 Standards
- Tilt (90°) and Swivel (360°) Head
- Large LCD Display (0.92 inch)
- Standard Pole or Optional Wall Mount for Indicator



ISO 9001 certified

CAS
S • C • A • L • E

BW series Battery Operated Bench Platform Scales

FEATURES


- Battery Operated: Alkaline or R/C Battery(not included)
- Low Battery Indicator
- Counting Feature is non Legal for Trade.
- Check Weigh Function (LOW / OK / HIGH)
- On/Off, Zero/Mode, Tare/Gross, kg/lb Functions
- Easy to Read 0.92 inch, 5 Digit LCD Displays with Back Light
- Full, Single Pass, Automatic Span Adjustment
- Auto Zero Tracking
- AC Adapter (12V DC 850 mA)
- NTEP Approval number : 98-085

SPECIFICATIONS

Model	BW - 15, 30	BW - 60, 150
Weighing Capacity	30 × 0.01 lb, 60 × 0.02 lb 15 × 0.005 kg, 30 × 0.01 kg	150 × 0.05 lb, 300 × 0.1 lb 60 × 0.02 kg, 150 × 0.05 kg
Display	5 Digit LCD (0.92 inch)	
Power Source	DC 12V 850mA AC Adapter DC 9V (1.5V × 6EA Size "C") Dry Battery DC 7.2V (1.2V × 6EA Size "C") R/C Battery	
Power Consumption	Approx. 0.15 W	
Battery Life	Alkaline dry Battery : 300hr R/C Battery : 80hr	
Charging time	2 ~ 4 hr	
Operating Temperature	- 10 °C ~ +40 °C	
Weighing Pan Size (inch)	11(W) × 11(D)	15.7(W) × 20.7(D)
Product Size (inch)	11(W) × 18(D) × 22.7(H)	16.7(W) × 26.6(D) × 29.7(H)
Product Weight (lb)	11.68lb	38.36lb


OPTIONS

- OP-1 : Well Mount Kit
- OP-2 : RS-232 C
- OP-3 : Wet-cover



Wall Mount Kit

APPLICATIONS

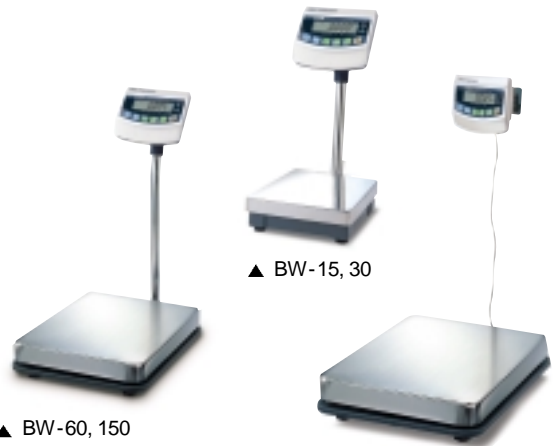

▲ BW-60, 150

▲ BW-15, 30

▲ Wall Mount Display/Platform

SWIVEL TILT HEAD DESIGN



Tilt up-down angle, 90° (Max.)

Turn left-right angle, 360° (Max.)



CAS USA Corporation

NJ OFFICE
99 Murray Hill Parkway
East Rutherford, NJ 07073
Tel: (201) 933-9002
Fax: (201) 933-9025

<http://www.cas-usa.com>

CA OFFICE
733 S. State College Blvd #98
Fullerton, CA 92831
Tel: (714) 870-1286
Fax: (714) 870-1167



Specifications are subject to change for improvement without prior notice. 1999. 3