

Rice Lake VS-30



Model Rice Lake VS-30

Specifications

Capacity:

1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions Without Ramps:

(W x L x H) 32 in x 29.5 in x 2.375 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries
Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (14° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Approvals:

c-Met, E113986

Warranty:

Two-year limited warranty

Standard Features

- Two wheels for portability
- Single ramp
- Non-slip platform
- Push-button LCD display
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- Communication via USB
- Tare function
- Hold function
- Factory calibrated
- Bluetooth Low Energy (BLE) models are available. BLE capability is not designed for cell phone applications and will require a third-party program to be written for use with a tablet, desktop computer, or patient management software

APPROVALS




Part Number/Price

Part #	Model #	Capacity	Price
204396	Rice Lake VS-30	1,000 x 0.2 lb (450 x 0.1 kg) with USB	Consult
212250	Rice Lake VS-30BLE	1,000 x 0.2 lb (450 x 0.1 kg) with USB	Consult

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
204396	Rice Lake VS-30	45	44	7	78	100	100
204396	Rice Lake VS-30BLE	45	44	7	78	100	100

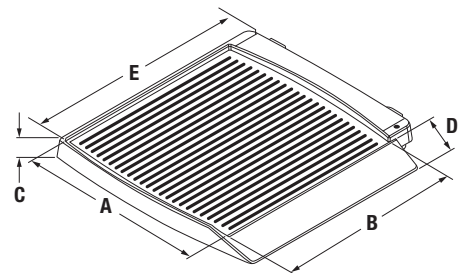

Dimensions

	Inches	Centimeters
A	29.5	74.9
B	32	81.3
C	2.4	6.1
D	9.25	23.5
E	37.5	95.3