

Rice Lake VS-31



Model Rice Lake VS-31

Specifications

Capacity:

1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions Without Ramps:

(W x L x H) 35 in x 29.5 in x 2.375 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries
Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (10° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

Approvals:

c-Met, E113986

Warranty:

Two-year limited warranty

Standard Features

- Two wheels for portability
- Dual ramp
- Non-slip platform
- Push-button LCD display
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- Communication via USB
- Tare function
- Hold function
- Factory calibrated
- Bluetooth Low Energy (BLE) models are available. BLE capability is not designed for cell phone applications and will require a third-party program to be written for use with a tablet, desktop computer, or patient management software

APPROVALS




Part Number/Price

Part #	Model #	Capacity	Price
204397	Rice Lake VS-31	1,000 lb x 0.2 lb (450 kg x 0.1 kg) with USB	Consult
212251	Rice Lake VS-31BLE	1,000 lb x 0.2 lb (450 kg x 0.1 kg) with USB	Consult

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
204397	Rice Lake VS-31	53	45	7	86	121	121
212251	Rice Lake VS-31BLE	53	45	7	86	121	121

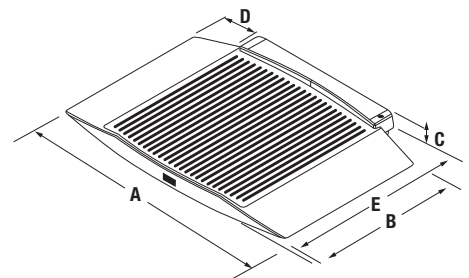

Dimensions

	Inches	Centimeters
A	48.5	123.2
B	32	81.3
C	2.4	6.1
D	9.3	23.6
E	38	96.5