

Specifications

Capacity:

1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions Without Ramps:

(W x L x H) 35.0 in x 29.5 in x 2.4 in

Platform Dimensions with Wheels and Ramps

(W x L x H) 34.2 in x 63.7 in x 3.7 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries
Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (10° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

Approvals:

c-Met, E113986

Warranty:

Two-year limited warranty



Rice Lake VS-40

Standard Features


- Two wheels for portability
- Large dual ramp
- Non-slip platform
- Large 1-inch LCD display
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- Communication via USB
- Tare function
- Hold function
- Factory calibrated
- 7 ft cable between scale base and display
- Bluetooth Low Energy (BLE) models are available. BLE capability is not designed for cell phone applications and will require a third-party program to be written for use with a tablet, desktop computer, or patient management software

Part Number/Price

Part #	Model #	Capacity	Price
204407	Rice Lake VS-40	1,000 lb x 0.2 lb (450 kg x 0.1 kg)	Consult
212249	Rice Lake VS-40BLE	1,000 lb x 0.2 lb (450 kg x 0.1 kg)	Consult

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
204407	Rice Lake VS-40	67.2	36	6	154	104	154
212249	Rice Lake VS-40BLE	67.2	36	6	154	104	154

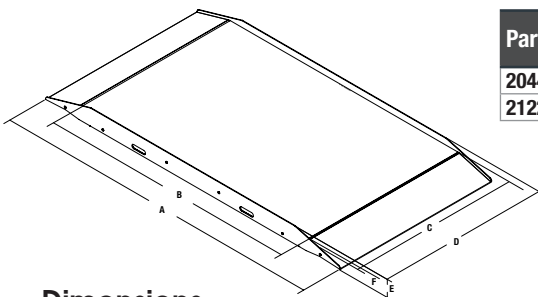

Dimensions

	Inches	Centimeters
A	63.8	162
B	49.3	125.3
C	32.7	83.1
D	32.7	83
E	3.9	9.8
F	2.6	6.7